


Application No. 95 92 7856.5  
Elan Drug Delivery Limited  
Our ref.: D1982 EP/OPP

⑬  **Europäisches Patentamt**  
**European Patent Office**  
**Office européen des brevets**

⑪ Publication number:

**0 072 046**  
**A1**

⑫ **EUROPEAN PATENT APPLICATION**

⑦① Application number: 82200841.3

⑤① Int. Cl.<sup>3</sup>: A 61 K 9/72, A 61 K 31/35

⑦② Date of filing: 06.07.82

⑦③ Priority: 24.07.81 GB 8122846

⑦④ Date of publication of application: 16.02.83  
Bulletin 83/7

⑦⑤ Designated Contracting States: AT DE IT NL SE

⑦① Applicant: Fisons plc, Fison House Princes Street,  
Ipswich Suffolk IP1 1QH (GB)

⑦② Inventor: Forrester, Raymond Brian, 42 Roman Way,  
Elworth Sandbach Cheshire (GB)  
Inventor: Boardman, Terence David, 92 Elmwood Road,  
Northwich Cheshire (GB)

⑦④ Representative: Craig, Christopher Bradberry et al,  
Fisons plc 12 Derby Road, Loughborough Leicestershire  
LE11 0BB (GB)

⑦⑥ Inhalation drugs, methods for their production and pharmaceutical formulations containing them.

⑦⑦ There is described a finely divided inhalation drug, e.g. sodium cromoglycate, comprising a therapeutically effective proportion of individual particles capable of penetrating deep into the lung, characterised in that a bulk of the particles which is both unagglomerated and unmixed with a coarse carrier, is sufficiently free flowing to be filled into capsules on an automatic filling machine and to empty from an opened capsule in an inhalation device. A number of the individual drug particles have a spherical, collapsed spherical or ring doughnut shape.

There is also described a method of marking the fine particles and pharmaceutical formulations containing them.



5µm 5000x



5µm 5000x



5µm 5000x



2µm 10000x

ACTORUM AG

**BEST AVAILABLE COPY**

22-07-2004

EP 0 072 046 A1

3126/4927/109/sm

-2-

0072046

INHALATION DRUGS, METHODS FOR THEIR PRODUCTION AND  
PHARMACEUTICAL FORMULATIONS CONTAINING THEM

This invention relates to a novel form of drug and to methods for its production and formulation.

5 In our British Patent No. 1,122,284 we have described and claimed an insufflator device for use in the administration of powdered medicaments by inhalation. With that device, and other devices, e.g. that described in British Patent Specification No. 1,331,216, and  
10 European Patent Application No. 813021839 a user inhales air through the device which causes a powder container mounted therein to rotate. Powder within the container is fluidised and dispensed into the air stream which is inhaled by the user. For optimum dispensing it has been  
15 found that the powdered medicament particles should be comparatively free-flowing and yet should have an ultimate particle size of less than about ten microns to ensure adequate penetration of the medicament into the lungs of the user. These two requirements are prima facie mutually  
20 exclusive, since such fine powders are not usually sufficiently free-flowing. It has in the past been found that this problem can be mitigated or overcome, e.g. as described in US Patent 4,161,516, by forming the powdered medicament into small soft pellets or soft granules. Both  
25 soft pellets and soft granules will fluidise satisfactorily within the container and yet are of sufficiently low internal coherence to break up into finer

-2-

BEST AVAILABLE COPY

0072046

3126/4927/109/sm

-3-

0072046

particles of medicament of a therapeutically effective size in the turbulent airstream around the outside of the container. However the procedure of forming the micronised drug into soft pellets or granules is both difficult and expensive. An alternative means of getting the fine particles to flow and disperse satisfactorily has been to mix them with a coarse carrier, e.g. coarse lactose (see US Patent No. 3,957,965). However with all pharmaceuticals it is desirable to use as pure a form as possible (inter alia to avoid any possible adverse reactions by the patient to the excipients) and the presence of the coarse carrier is not therefore desirable. Furthermore the mixing of the fine drug with the coarse carrier involves the extra expense of the carrier, the possibility of segregation of carrier and drug during transport and storage, and extra process steps which add to the cost of production. Production of both the pelletised material and the blend of fine material with the coarse carrier involves the initial step of micronising the drug. Sodium cromoglycate has been made, for blending with lactose or agglomeration into soft nearly spherical pellets and administration by inhalation, as a micronised dry powder and in this form consists mostly of rods or lath-shaped crystals. In both the pelletised and blended material energy is needed to break

3126/4927/109/sm

-4-

0072046

0072046

up the pellets or to separate the fine drug from the coarse carrier before or during inhalation. Thus in many instances it has also been found that the amount of drug which is available as fine particles in the air stream is dependent on the rate at which air is passed through the inhaler (i.e. the amount of energy imparted to the formulation). This can be particularly disadvantageous when the drug is used to treat patients suffering from conditions affecting their ability to breath.

Thus for many years the production of drugs in a form in which they can flow easily (and therefore be filled readily into capsules) while at the same time being of a sufficiently small particle size to penetrate deep into the lung has presented a problem which has only been capable of resolution by means of complex procedures.

We have now found particles which can penetrate deep into the lung and yet which are sufficiently free flowing to be filled into capsules, and otherwise manipulated, without mixing with a coarse diluent or formation into soft pellets or granules. We have also found that these particles can disperse well from an inhaler at both low and high air flow rates, thus, in certain circumstances, improving consistency of capsule emptying. Furthermore we have found that the new particles can, in general, be coarser than those of the prior art while giving an

-4-

0000000000

3126/4927/109/sm

-5-

0072046

equivalent proportion of particles capable of penetrating deep into the lung.

According to the invention we provide a finely divided inhalation drug comprising a therapeutically effective  
5 proportion of individual particles capable of penetrating deep into the lung, characterised in that a bulk of the particles which is both unagglomerated and unmixed with a coarse carrier, is sufficiently free flowing to be capable of being filled into capsules on an automatic filling  
10 machine and to empty from an opened capsule in an inhalation device.

According to the invention we also provide a drug in finely divided and unagglomerated form, wherein a substantial proportion of the individual drug particles  
15 have a spherical, collapsed spherical, i.e. where one or both sides of the sphere appear to have been pushed inwards, or toroidal shape, i.e. the shape of a ring doughnut. The ring doughnut shapes may have a hole through the middle or may have a thin membrane filling the  
20 hole. In certain cases a population of two or more of spheres, partially collapsed spheres, fully collapsed spheres and ring doughnut shapes is found.

The individual particles should be as rounded and smooth as possible to enable them to be carried easily in  
25 an air stream and to flow readily on capsule filling

-5-

BEST AVAILABLE COPY

22-07-2004

0072046

The surface texture of the particles will vary according to the particular drug concerned and the techniques used to produce the particles, and can vary from a highly convoluted (brain like) structure to a random fluffy or to a smooth texture. In general we

U. V. S. S. R.

-7-

0072046

•

5

10

15

20

25

3126/4927/109/sm

-8-

0072046

and the final suspension volume, the particle density can be calculated.

or b) the air pycnometer method in which a given amount of powder is placed in a chamber which is hermetically sealed. The volume of the chamber is gradually reduced by a moving piston until a specified pressure is reached. The position of the piston indicates the volume of the powder particles, hence the particle density can be calculated.

10 We prefer the particles, e.g. of sodium cromoglycate, to have a particle density according to the above methods of from about 1.3 to 1.7 and preferably from 1.3 to 1.6 g/cm<sup>3</sup>.

15 The micronised material, e.g. sodium cromoglycate, of the prior art has a loose bulk density of about 0.21 g/cm<sup>3</sup> and a packed bulk density of about 0.29 g/cm<sup>3</sup>. In measuring loose bulk density a suitable amount of powder (40g) is poured, at an angle of 45°, into a measuring cylinder (250ml). The volume occupied by the powder in the measuring cylinder when related to the original mass of powder provides the measure of "loose bulk density". If the powder, in the cylinder, is tapped or jolted, e.g. using the Engelsmann Jolting Volumeter, until a stable volume is attained (500 jolts) then the lower volume after jolting when compared with the original

20

25



0000000000

3126/4927/109/sm

-9-

0072046

mass of powder provides the measure of "packed bulk density".

It is also known, e.g. from British Patent Specification No. 1,549,229 that hard granules of sodium cromoglycate of particle size 60 to 200 microns (measured by sieving) can have higher bulk densities than the micronised material. However these hard granules were not designed for, and indeed would be unsuitable for, inhalation. Surprisingly we have found that the particles of the present invention have a higher bulk density than micronised material, e.g. micronised sodium cromoglycate. We prefer the particles of the present invention to have a loose bulk density of greater than about  $0.3 \text{ g/cm}^3$ , preferably of greater than  $0.35 \text{ g/cm}^3$ , more preferably of from  $0.35$  to  $0.5 \text{ g/cm}^3$ , and most preferably  $0.35$  to  $0.4 \text{ g/cm}^3$ ; and a packed bulk density of from about  $0.4$  to  $0.75 \text{ g/cm}^3$  and preferably of from  $0.55$  to  $0.6 \text{ g/cm}^3$ .

The bulk densities of materials are, in general, relatively independent of the particular material used, but are dependent on the shape, size and size distribution of the particles involved.

We prefer the particles of the invention, when they comprise sodium cromoglycate and are intended for administration as a dry powder in, for example, a gelatine capsule to have a moisture content of from 5 to 14, and.

-10-

U.S. • U.S. • U.S.

0072046

10

25

0000000000

3126/4927/109/sm

-11-

0072046

comprise the active ingredient together with a suitable diluent, e.g. lactose. The incorporation of the diluent in the particle avoids the possibility of segregation which is possible when individual fine particles of active ingredient are used with separate coarse particles of diluent.

We prefer that at least 50% by weight and preferably more than 90%, of the drug particles are of less than 60 microns, more preferably of less than 40 microns, most preferably of less than 20 microns and especially of less than 10 microns, e.g. less than 2 microns in diameter. We particularly prefer at least 50% of the particles to be of 2 to 6 microns in diameter. In general the smaller the mass mean diameter of the material the higher will be the dispersion of the material, as measured by the test of Example A(a).

Material according to the invention, e.g. sodium cromoglycate, having a median diameter of from 10 to 15 microns can, because of the enhanced aerodynamic properties of the particles, be equivalent in emptying and dispersion properties (see Example A) to micronised (i.e. sub 10 micron) material which has been formed into soft pellets as described in US Patent 4,161, 516 or blended with coarse lactose as described in US Patent 3,957,965.

The particle sizes in this specification are those

3126/4927/109/sm

-12-

0072046

measured with a Coulter Counter TALL used in a standard laboratory environment, or the pipette centrifuge. In measuring particle sizes with a Coulter Counter, the sample to be analysed is dispersed in an electrolyte into which dips a glass tube. The glass tube has a 50 to 400 micron hole through the wall thereof with electrodes mounted on either side of the hole in the tube wall. The tube is immersed sufficiently for the hole and electrodes to be submerged in the liquid. The suspension is made to flow through the hole in the glass tube and as each particle passes through the orifice it displaces its own volume of electrolyte, thus changing the resistance across the hole. This change in resistance is converted into a voltage pulse with an amplitude proportional to the particle volume. The pulses are fed to an electronic counter with an adjustable threshold level such that all pulses above the threshold are counted. By setting the threshold level at different values it is possible to determine the number of particles falling within given size ranges and thus the proportion of particles in a sample which fall outside a desired particle size range. The Coulter Counter measures the volume of a sphere having the same volume as the unknown material, i.e. it measures a volume diameter.

In measuring particles by the pipette centrifuge

-12-

0072046

3126/4927/109/sm

-13-

0072046

(Christison Scientific Equipment Limited) the powder is suspended in a suitable liquid (e.g. n-butanol). The suspended sample is put in a constant speed centrifuge. Samples are withdrawn from the centrifuge at selected time intervals. The level of solids in each sample is measured (normally by drying) and the average diameter calculated using an equation derived from Stokes Law (Particle Size Measurement Published by Chapman Hall 3rd Ed. Dr. T. Allen, page 377 et seq.). The pipette centrifuge measures a mass, or Stokes, diameter.

The Coulter counter (with a 100 micron hole) is able to measure particle sizes of from about 2 to 40 microns and the pipette centrifuge is able to measure particle sizes down to about 0.2 microns.

According to the invention we also provide a process for the production of finely divided drug, which comprises atomising and drying a solution of the drug and collecting some or all of the particles which are below 60, preferably below 40, more preferably below 20 and especially below 10 microns in diameter. The particles are preferably of the sizes given above.

Spray or flash drying of materials is well established as a drying technique in the food and other industries, but is scarcely used at all in the pharmaceutical industry. Thus spray drying is routinely used in the

3126/4927/109/sm

-14-

0000000000

0072046

production of coarse particle products such as dried milk, instant coffee and dextran. The use of spray drying techniques to produce very fine powders is not conventional and is unknown in the pharmaceutical field, the normal technique for producing such fine powders being to make, and then micronise, a crystalline drug. The use of a spray drying technique is advantageous in that it is adapted to suit large batch productions, thus decreasing the amount of quality control required and also in that it may remove the need for recrystallisations and micronisation to get the drug into the desired form.

Any suitable form of atomiser can be used. Atomisation results from an energy source acting on liquid bulk.

Resultant forces build up to a point where liquid break-up and disintegration occurs and individual spray droplets are created. The different atomisation techniques available concern the different energy forms applied to the liquid bulk. Common to all atomisers is the use of energy to break-up liquid bulk. Centrifugal, pressure and kinetic energy are used in common forms of atomiser.

Sonic and vibratory atomisers are also used. Specific atomisers which may be mentioned include rotary atomisers, e.g. those involving vaned wheels, vaneless discs, cups, bowls and plates; pressure atomisers, e.g. those involving pressure nozzles, centrifugal pressure nozzles, swirl

0000000000

: 3126/4927/109/sm

-15-

0072046

- chambers and grooved cores; kinetic energy or pneumatic atomisers, e.g. those involving two or three fluids, or internal or external mixing; and sonic energy nozzles, e.g. involving sirens or whistles. We prefer to use
- 5 kinetic or pneumatic energy atomisers particularly two fluid pressure or syphon or sonic nozzle atomisers. In general two fluid pressure nozzles tend to produce powders having more desirable characteristics than two fluid syphon nozzles and two fluid pressure nozzles also tend to
- 10 give more reproducible results and use less energy.

The atomiser can be used in a spray or flash drying apparatus.

- The conditions of operation of the apparatus and storage of the solution (e.g. pH and temperature) should
- 15 clearly not be such as to degrade the drug, or introduce impurities, or biological contamination, into the drug.

- The spray drying apparatus preferably comprises the atomiser, a main chamber, one or more (e.g. two) cyclones, a bag filter and, if desired or necessary to maximise
- 20 recovery, a terminal wet scrubber or electrostatic precipitator. The particle collection system is designed to capture the desired size range of particles and also to maximise the yield. All over and under size material may be recovered and recycled or put to other uses.

- 25 The solution of the drug may be in any suitable

• • • • •

0072046

-16-



0000000000

3126/4927/109/sm

-17-

0072046

suitable.

The temperature of the solution to be fed to the spray drier will vary with the drug and the solvent to be used. In general we prefer to use a temperature at which the solution can be stored for a long period in large batches without degradation. As high a temperature as possible comensurate with stability is desirable to reduce solution viscosity and provide energy to the drying process.

The air flow rate, direction into the spray drier, the temperature of the air and the rate of feed of solution to the spray drier can be optimised by simple experiment. All of the parameters in the spray drying process interrelate and can be adjusted to produce the desired product.

Gases other than air, e.g. nitrogen, can be used if desired. The use of an inert gas will be advantageous when an inflammable solvent or a readily oxidisable drug is used. The gas used, e.g. air or nitrogen, may, if desired, be recycled to avoid loss of entrained drug and/or to conserve energy and the inert gas.

The particle size of the product will be set by the concentration of the feed solution, the rate of feed to the spray drier, the means of atomising the solution, e.g. the type of atomiser and the pressure of the air, and solution to be dried, the temperature and temperature

0072046

3126/4927/109/sm

-18-

0072046

gradient within the drier and, to a small extent, the air flow in the drier. The particle size and air flow will then dictate where the desired product is collected and the means of collection.

- 5 The particle size of the product tends to remain fairly constant with liquid flow rate through the atomiser, but to decrease with increasing air pressure up to a limiting pressure, e.g. of about  $11\text{Kg cm}^{-2}$ . The range of air pressures suitable will naturally depend on
- 10 the atomisation device used, but we have found that air pressures of from about  $2\text{Kg cm}^{-2}$  to  $11\text{KG cm}^{-2}$  are in general effective, e.g. with a 0.4mm orifice syphon two fluid nozzle. In order to achieve reproducible results we prefer to maintain a constant air flow to the dryer and
- 15 appropriate air flow control devices may be used if desired.

- The cyclone or cyclones used to collect the dried particles are of conventional design, but adapted to collect finer particles than is normal. Thus the pressure
- 20 differential across the cyclones, the combination of two or more cyclones and the design of the particular cyclones used may be adjusted to enable capture of the fine particles. The bag filter used to collect the finest material is of conventional design and is readily
- 25 available. The filter medium within the bag filter

: . . . .

3126/4927/109/sm

-19-

0072046

preferably has a high capture efficiency for particles of approximately 0.5 microns in diameter and greater. A particularly suitable medium is a polytetrafluoroethylene membrane supported on a polypropylene or polyester cloth, e.g. a needle felt cloth. Any electrostatic precipitator, or wet scrubber, used will also be of conventional design.

The product may be classified, e.g. sieved or air classified, to remove over and under sized material. The over and under sized material may be recycled or used for other purposes.

The final product may be put up in any suitable form of container such as a capsule or cartridge. Where it is desired to use the product in association with other ingredients such as colourants, sweeteners or carriers such as lactose, these other ingredients may be admixed with the particles of the invention using conventional techniques or may be incorporated in the solution to be spray dried. We prefer the particles of the invention to contain medicament and water only. Mixtures of two or more different particles according to the invention, e.g. of sodium cromoglycate and a bronchodilator, such as isoprenaline sulphate or terbutaline sulphate, may be made and filled into suitable containers.

According to our invention we also provide a method of application of a medicament, e.g. sodium cromoglycate, to

3126/4927/109/sm

-20-

0072046

a patient by way of inhalation, the medicament being dispersed into an air stream, characterised in that an opened, e.g. pierced, container, e.g. capsule, containing particles according to the invention is rotated and

5 vibrated in an air stream which is inhaled by the patient. The rotation and vibration may conveniently be produced by any one of a number of devices, e.g. the device of British Patent Specification No. 1,122,284.

10 The particles according to the invention may also be used in pressurised aerosol formulations (together with propellant gases, e.g. a mixture of two or more of propellants 11, 12 and 114, preferably with a surface active agent, e.g. sorbitan trioleate) or may be formed

15 into soft pellets, e.g. as described in US Patent Specification No. 4,161,516, or may be used for application to the skin. Sodium cromoglycate is known to be of use in the treatment of a wide variety of conditions, e.g. asthma and hay fever.

20 From another aspect the invention also provides a capsule, cartridge or like container containing particles according to the invention, optionally in association with other particles. We prefer the container to be loosely filled to less than about 80% by volume, preferably less than about 50% by volume, with the particles of the

25 invention. The particles are preferably not compacted.

3126/4927/109/sm

-21-

0072046

into the container. We prefer the container, e.g. capsule, to contain from 10 to 100 mg, e.g. about 20mg, of the particles.

The invention will now be illustrated by the following Examples in which all parts and percentages are by weight unless otherwise stated..

Example 1

The active compound (A) was dissolved in a solvent, normally water, to a concentration B (% w/v). This solution flowed under pressure or vacuum to the atomiser. At the atomiser the solution temperature was normally greater than 50°C. Conditions of atomisation (C) and of droplet drying (D) were preset and remained constant throughout the run. The powder was captured in the drying chamber, in two cyclones (firstly a Vantongerren Buell AC 130 cyclone of diameter 22 cm and height 74 cm and secondly a high efficiency Stairmand formula cyclone of diameter 14 cm) and finally in a bag filter which had as the filter media polytetrafluoroethylene lined polypropylene. At the end of each run the contents of each collection vessel was weighed (E) and sized(F) (Coulter Counter Model TAll).

a) Varying Active Ingredients

Using a concentration (B) of 10% w/v in water, and atomisation conditions (C) a pressure two fluid nozzle

-21-

3126/4927/109/sm

-22-

0072046

(0.4mm orifice), a solution flow rate of  $65 \text{ ml min}^{-1}$  and an atomisation pressure of  $27 \times 10^3 \text{ Kg m}^{-2}$  the results shown in Table 1 were obtained.

Note - Electron micrographs (see Figures 1 to 4) showed.

Salbutamol Sulphate - smooth spheres

Terbutaline Sulphate - "orange peel" spheres

Isoprenaline Sulphate - smooth spheres

4,6-Dioxo-10-propyl-4H,6H-pyrano[3,2-g]

pyran-2,8-dicarboxylic acid disodium salt "orange peel" spheres with surface cracks

Sodium Cromoglycate )

Sodium Cromoglycate/ ) "doughnut", spheres and other active ingredients) collapsed spheres

#### b) Varying Atomisation Techniques

Active ingredient (A) - Sodium Cromoglycate.

Conditions used and results obtained are given in Tables 2 and 2a.

Two fluid syphon nozzle - CT (London) Ltd. CT Type

J1A 16/50 (4mm orifice)

Two fluid pressure nozzle - CT (London) Ltd. CT Type

J11

Ultrasonic nozzle - Ultrasonics Ltd, Q35 H

Sonicore nozzle

Swirl Air nozzle - Delevan Ltd - Swirl Air

3126/4927/109/sm

-23-

0072046

Nozzle Type 32163-1

c) Variation of Powder Collection Techniques

The powder is collected in the drying chamber, cyclones and a bag filter.

5 Active ingredient A - Sodium Cromoglycate.

Conditions used and results obtained are given in Tables 3 and 3a.

Powder Capture Equipment

10 Main chamber (MC) size - 13 cu ft (give metric equivalent)

Cyclone A - Stairmand High Efficiency Cyclone (Diameter 14cm)

Cyclone B - Vantogeren Buell AC 130 Cyclone (Diameter 22cm, Height 74cm)

15 Cyclone C - Stairmand High Efficiency Cyclone (Diameter 11.9cm)

Bag Filter (BF) - 1.86 M<sup>2</sup> polytetrafluoro ethylene lined polyester

20 d) Variation of Droplet Drying Time

Droplet drying time is dependent upon both the temperatures used in drying, i.e. air inlet temperature, the residence time in the drying chamber (normally this is as a result of drying chamber size) and level of

25 evaporation required. Residence time can be changed by

-23-

: 3126/4927/109/sm

-24-

0072046

modifying the drying air flow rate but this results in a significant change in efficiency of capture within the latter cyclones. Table 4 indicates the range of drying conditions used. Increased residence time (i.e. slower drying) produces improved particles with improved performance.

Electron micrographs of a selection of the above powders are shown in the accompanying Figures. Figures 11 and 12 are electron micrographs of, respectively pelletised sodium cromoglycate, and micronised sodium cromoglycate and are included for comparison purposes only. In each of Figures 1 to 12 the magnification and an approximate scale is given.



TABLE 1

RUN NO.	ACTIVE INGREDIENT (A)	DRYING CONDITIONS (D)				POWDER RECOVERED E/F			ELECTRON MICROGRAPH
		INLET TEMP.	OUTLET TEMP.	AIR FLOW RATE	MAIN CHAMBER	CYCLONE		CYCLONE A	
						B	A		
		°C	°C	m <sup>3</sup> s <sup>-1</sup>		micron volume median diameter		Figure No	
1.	Sodium Cromoglycate	195	100	0.034	2.0/-	80/7.5	18/3.4	1 (B cyclone)	
2.	Terbutalene Sulphate	202	102	"	-/-	83/4.3	17/4.0		
3.	Salbutamol Sulphate	204	105	"	-/-	78/4.1	22/2.7		
4.	Isoprenaline Sulphate	201	100	"	33/-	34/6.5	33/3.3		
5.	4,6-Dioxo-10-propyl-4H,6H-pyranol[3,2-g]pyran-2,8-dicarboxylic acid disodium salt	200	100	"	7/16.5	78/6.2	15/4.1	2 (B cyclone)	
6.	Sodium Cromoglycate (100)/								
	Terbutalene Sulphate (0.522) w/w	200	101	"	8/-	75/6.6	17/3.6		
7.	Sodium Cromoglycate (100)/								
	Salbutamol Sulphate (0.522) w/w	220	88	"	17/-	58/7.4	25/4.2	4	
8.	Sodium Cromoglycate (100)/								
	Isoprenaline Sulphate (0.522) w/w	205	106	"	13/19.0	75/7.0	12/3.2		
9.	Salbutamol Sulphate * (1.6)/								
	Lactose (100) w/w	200	100	"	7/-		93/7.8 (cyclone C)		

\* Cyclone configuration changed to MC/C/BF.

312E/8495E/109/sm

0072046

TABLE 2

ATOMISATION CONDITIONS (C)				DRYING CONDITIONS (D)			POWDER RECOVERED E/F		
RUN	ATOMISER	SOLUTION		INLET AIR FLOW		MAIN CYCLONE		BAG	ELECTRON
		CONC	FEED RATE	PRESSURE	TEMP.	RATE	CHAMBER B	A	FILTER MICROGRAPH
NO.	TYPE	% w/v	Ls <sup>-1</sup> x10 <sup>-3</sup>	Kgm <sup>-2</sup> x10 <sup>3</sup>	°C	°C	m <sup>3</sup> s <sup>-1</sup>	micron volume median diameter	Figure No
10.	SLOTTED DISC	10	0.57	23000	220	134	0.034 *	91/15 9/5.2	5 (B cyclone)
11.	SLOTTED DISC	10	0.48	rpm	214	130	"	20/- 78/22 2/4.0	
12.	HOLED DISC	10	0.70		220	118	"	32/- 65/17 3/4.3	
13.	INVERTED CUP	10	0.50		215	127	"	21/24 79/17.7	6 (B cyclone)
14.	TWO FLUID SYPHON	5	0.33	150.7	238	125	0.034 1/-	19/4.5 31/2.8	49/-
15.	NOZZLE	20	1.33	150.7	205	94	"	26/15.5 12/7.4 62/3.1	
16.		10	0.90	56.4	210	108	"	7/- 70/8.5 23/3.0	
17.		10	0.63	105.7	225	113	"	5/- 34/4.7 31/2.9	30/2.1
18.	TWO FLUID	15	0.37	28.2	190	132	0.034 8/29	62/6.8 30/3.7	
19.	PRESSURE	10	0.33	28.2	200	95	"	12/- 77/9.2 11/3.5	
20.	NOZZLE	10	1.52	18.3	210	104	"	24/- 74/16.0 2/4.0	
21.	4mm orifice	10	0.42	39.5	203	137	"	5/25 53/10 33/3.4	9.3/0 7 (A cyclone)
22.	TWO FLUID	10	1.33	36.6	205	95	0.034 13/-	77/10.5 10/3.2	
23.	PRESSURE NOZZLE 5mm orifice	10	1.17	21.1	205	90	"	12/- 79/9.2 9/4.2	
24.	ULTRASONIC NOZZLE	10	1.47	35.2	210	87	0.034 6/-	82/9.6 12/3.3	8
25.	SWIRL AIR NOZZLE	15	1.17	49.3	200	90	0.034 13/-	79/14.5	8/- 9
* Chamber contents showed incomplete drying.									

\* Chamber contents showed incomplete drying.

3126/8496F/109/5m

0072046

0072046

- 27 -

TABLE 2a

Run. Dispersion No. (see Exam-ple 10)	Coulter Particle size	Density g/cm <sup>3</sup>	Bulk Density g/cm <sup>3</sup>	Moisture (see Exam-ple 10)	Emptying (see Exam-ple 10)	BET Permea-metry	Permeametry BET ratio
Air Pyon- Petro- Loose Packed							
ometer leum Ether							
% w/w	volume median diameter	% w/w	%	m <sup>2</sup> kg <sup>-1</sup> x10 <sup>3</sup>			
10. 12.6	15	-	86	-	-	-	-
10. 41.4	5.2	-	80	-	-	-	-
11. -	22	1.35	88	0.62	0.496	0.79	-
12. -	17	-	55	-	-	-	-
12. 40.0	4.3	-	88	0.48	0.33	0.69	-
13. -	17.7	1.56	57	-	-	-	-
14. -	2.9	-	93	-	-	-	-
15. 8.6	15.5	-	59.2	2.42	1.25	0.52	-
17. 21.4	2.8	1.59	98	-	-	-	-
20. -	24	1.33	92	-	-	-	-
23. 19.6	9.2	-	28	1.75	1.1	0.63	-
23. 26.1	4.2	1.55	96.3	-	-	-	-
24. 12.3	14.5	-	96	-	-	-	-
25. 24.4	9.5	-	-	-	-	-	-

26/8496E/109/sm

- 28 -

TABLE 3

RUN NO.	POWDER CAPTURE EQUIPMENT CONFIGURATION	ATOMISATION CONDITIONS (C)			DRYING CONDITIONS (D)			POWDER RECOVERED (E/F)			
		SOLUTION		ATOMISER TYPE	INLET AIR FLOW		MAIN CYCLONE	CYCLONE			
		CONC	FEED RATE		TEMP.	RATE		CHAMBER	A	B	C
		% w/v	$Ls^{-1} \times 10^{-3}$	$Kgm^{-2} \times 10^3$	°C	°C	$m^3 s^{-1}$	volume median diameter microns			
26.	MC/A/B/BF	TWO FLUID SYPHON	10	1.17	105.7	210	95	0.034	3/-	87/9.6	10/4.2
27.	MC/BF	NOZZLE									
28.	MC/B/A/BF	"	10	1.27	105.7	215	98	0.034	14/17		86/5.2
		"	10	0.88	105.7	218	112	0.034	3/-	40/2.9	35/5.4
29.	MC/BF	TWO FLUID PRESSURE	10	1.5	18.3	180	80	0.034	50/-		50/13.5
30.	MC/BF	NOZZLE 4mm	10	0.42	33.8	190	120	0.034	4/23		96/5.2
31.	MC/B/A/BF	ORIFICE	10	1.52	18.3	210	104	0.034	24/-	3/4.0	73/16
32.	MC/C/BF		10	0.9	35.2	195	95	0.034	11/-		86/6.5 3/-
33.	MC/BF	TWO FLUID PRESSURE	10	1.73	16.2	185	74	0.034	61/-		39/14
34.	MC/B/A/BF	NOZZLE 5mm	10	1.16	21.1	205	90	0.034	12/-	9/4.2	79/9.2
35.	MC/C/BF	ORIFICE	15	1.23	26.8	222	102	0.034	16/-		86/11.5

0072046

3126/8496E/109/SM

0072046

- 29 -

TABLE 3a

Run Dispersion No. (see Exam- ple Ac)	Pipette	Coulter Particle	Density Bulk	Moisture	Emptying	BET	Peramea-	Permeanetry
	Centrifuge particle size	g/cm <sup>3</sup>	g/cm <sup>3</sup>	(see Exam- ple Ab)	metry	BET ratio		
Air Pycn- Petro- Loose Packed								
		ometer	leum					
			Ether					
% w/w	mass median diameter	volume median diameter	% w/w	%	m <sup>2</sup> kg <sup>-1</sup> x10 <sup>3</sup>			
26. 25.4	-	4.2	-	91	-	-	-	-
27. 8.3	-	17.0	-	95	-	-	-	-
28. -	1.7	2.0	-	95	-	-	-	-
29. 17.1	-	13.5	-	97	-	-	-	-
31. -	-	24.0	-	98	-	-	-	-
32. 20.6	-	1.33	-	93	-	-	-	-
33. 20.0	-	8.5	-	97	-	-	-	-
34. 19.6	-	14.0	-	92	-	-	-	-
26.1	-	9.2	-	98	-	-	-	0.64
20.9	-	4.2	-	92.9	-	-	-	-
	-	11.5	-		-	-	-	-
	-	1.56	-		-	-	-	-
	-	4.55	-		-	-	-	-
	-	0.31	-		-	-	-	-
	-	0.43	-		-	-	-	-
	-	8.1	-		-	-	-	-
	-	1.75	-		-	-	-	-
	-	1.12	-		-	-	-	-
	-	0.64	-		-	-	-	-

3126/8496E/109/em

0072046

- 30 -

TABLE 4

ATOMISATION CONDITIONS				DRYING CONDITIONS				
RUN NO.	ATOMISER TYPE	SOLUTION CONC.	SOLUTION FEED RATE	ATOMISATION PRESSURE	INLET TEMP.	OUTLET TEMP.	AIR FLOW RATE	ELECTRON MICROGRAPH FIGURE
		% w/v	Ls <sup>-1</sup> x10 <sup>-3</sup>	Kgm <sup>-2</sup> x10 <sup>3</sup>	°C	°C	m <sup>3</sup> s <sup>-1</sup>	
36.	Two Fluid	20	1.67	176.2	165	88	0.034	
37.	Syphon Nozzle	5	0.48	55.0	345	254	0.034	
38.	Two Fluid Pressure Nozzle 4mm	10	0.67	35.2	305	122	0.034	10 (1st cyclone)
39.	Orifice	10	1.28	23.3	140	60	0.034	

3126/4927/109/sm

-31-

0072046

Example 2

The experiment was carried out using a spray drier which had a main chamber and a single cyclone. (Main chamber  $0.37\text{m}^3$ , cyclone Stairmand High Efficiency design with diameter 119mm). Atomisation was achieved using a two fluid pressure nozzle with orifice diameter 0.44mm. With an aqueous sodium cromoglycate feed solution concentration of 15 % w/v, an air flow rate of  $0.034\text{M}^3\text{s}^{-1}$  and other conditions set out in Table 5, the results shown in Tables 5, 5a and 5b were obtained. Table 5b gives test results when the powders produced according to this Example have been filled into hard gelatine capsules.

- 32 -

TABLE 5

RUN NO.	ATOMISATION CONDITIONS (C)		DRYING CONDITIONS (D)		POWDER RECOVERED E/F	
	SOLUTION FEED RATE Ls <sup>-1</sup> x 10 <sup>-3</sup>	ATOMISATION PRESSURE Kgm <sup>-2</sup> x 10 <sup>3</sup>	INLET TEMP °C	OUTLET TEMP °C	MAIN CHAMBER %/Micron Volume Median Diameter	CYCLONE
40.	1.33	27.5	190-200	70-80	33/-	67/13.0
41.	1.58	21.1	220-230	85-95	40/-	60/14.7
42.	1.43	25.4	195-200	80-90	20/-	80/13.8
43.	1.50	24.0	195-204	75-85	33/-	67/13.7
44.	1.58	22.6	190-200	70-80	36/-	64/14.0
45.	1.50	24.0	195-205	80-90	34/-	66/16.5

0072046

3126/8496E/109/sm



- 33 -

TABLE 5a

POWDER DATA

TEST	RUN NUMBER				
	40	41	42	43	44
Moisture % w/w	8.8	9.7	8.4	9.8	9.5
Particle Size:					
Volume median diameter microns	13.0	14.7	13.8	13.7	14.0
% w/w 6 microns	10	8	9	8	7
% w/w 30 microns	4	7	8	8	15
Loose Bulk Density g/cm <sup>3</sup>	0.39	0.38	0.39	0.38	0.36
Packed Bulk Density g/cm <sup>3</sup>	0.58	0.56	0.58	0.57	0.57
					0.59
					0.57

0072046

3126/8496E/109/sm

TABLE 5b

CAPSULE DATA

-34-

TEST	RUN NUMBER				
	40	41	42	43	44
Moisture Content & w/w					45
Powder when in the capsule	12.1	11.9	12.2	12.2	13.3
Capsule shell	13.9	14.2	13.3	13.5	13.1
Total mg/capsule	11.8	11.9	11.9	11.6	11.6
Emptying Test & w/w (See Example Ab)					
Mean	95.4	96.4	97.1	97.2	97.4
Range	87.3-99.1	92.6-99.3	93.1-100	95.5-98.9	92.7-100
Dispersion mg/capsule (See Example Ac)	5.32	4.03	4.74	4.97	4.28
					3.12

0072046

3126/8496E/109/sm

3126/4927/109/sm

-35-

0072046

Example 3Pressure Nozzle

The trial was carried out using a spray drier having a main chamber and a single cyclone.

5 This experiment was used to demonstrate that the pressure nozzle was capable of providing small particles and establishing the order of magnitude of pressure required to produce particles with an average mass mean diameter of less than 10 microns. An atomiser pressure of  $2.1 \times 10^6 \text{ Kg m}^{-2}$ , a feed concentration of 6% w/v of aqueous sodium cromoglycate, an air inlet temperature of  $230^\circ\text{C}$  and an air outlet temperature of  $120^\circ\text{C}$  was used. The resulting powder had particles of size 11 microns mass mean diameter with a particle bulk density similar to that of micronised powder, but with a tapped bulk density twice that of micronised powder. The powder was satisfactory in the capsule emptying test.

15 The appearance of the powder under the light microscope was of uniform spheres or collapsed spheres with negligible fractured particles.

Example A

25 The drug is dispensed from a gelatine capsule 6.4mm in diameter and having two holes 0.8mm in diameter in a shoulder thereof mounted in a device (commercially available under the Registered Trade Mark 'Spinhaler')

3126/4927/109/sm

-36-

0000000000

0072046

according to British Patent No. 1,122,284 having a drawn wire shaft 2.03mm diameter journalled in a hard nylon bearing tube 13mm long and having an internal diameter of 2.08mm at its inner end (i.e. that end housing the free end of the shaft) and of 2.44mm at its other end.

The particles are preferably such that when put up in gelatine capsules 6.4mm in diameter each containing 20mg of the particles they meet the criteria set out in the tests below:-

(a) Dispersion test

The filled capsules are mounted in the capsule holder of the powder insufflator (having the specific dimensions set out immediately above) of British Patent Specification No. 1,122,284 and pierced to produce two holes of 0.8mm diameter in a shoulder of the capsule. The dispersion of the medicament in the cloud delivered by the insufflator is determined using a modified version of the multistage liquid impinger described in British Patent Specification No. 1,081,881. The modifications incorporated in the present design are the addition of an extra impingement stage, and of a glass tube with a right angled bend approximately mid-way along its length. The extra impingement stage was added prior to the three stages described in British Patent Specification No. 1,081,881 and consists essentially of a jet of internal diameter

3126/4927/109/sm

-37-

0072046

- 2.5cm and a collection plate of diameter 5cm designed to give an effective cut-off of approximately 12 microns at an air flow rate of 60 litres per minute. The glass tube, also of internal diameter 2.5cm abutts the external end of the jet of the extra stage. The insufflator is inserted into the upper, horizontal end of the glass tube and air drawn through at 60 litres per minute for 30 seconds. At least five capsules are treated in this manner and the results are averaged. The weight of the medicament collected on each stage of the impinger, on the glass tube, and on a filter paper positioned after the final stage is determined spectrophotometrically after solution in an appropriate volume of distilled water (or by any other appropriate method).
- The particles disperse satisfactorily if an average total for each capsule of at least 0.5mg, preferably at least 2.5mg and most preferably at least 5.0mg of the particles are found on a combination of the last two stages and filter paper of the multi-stage liquid impinger.
- (b) Emptying test

- The filled capsules are mounted in the capsule holder of the powder insufflator (having the specific dimensions set out above) of British Patent Specification No. 1,122,284 and pierced to produce two holes of 0.8mm diameter in a shoulder of the capsule. The insufflator is

-37-

0072046

3126/4927/109/sm

-38-

0072046

placed in a device adapted to suck air through it for 2.5 seconds, the air flow rate at no time exceeding 60 litres per minute, and being held at 60 litres per minute for at least 2 seconds. The capsule mounted in the insufflator is subjected to 4 sucks as described and the weight of the material remaining in the capsule is determined. The above procedure is repeated 20 times and the average of the results determined.

The capsules empty satisfactorily if an average of at least 50%, preferably at least 75% and most preferably at least 90% by weight of the material has emptied from each capsule.

(c) Dispersion

Single Stage Impinger

In a further refinement, the multistage liquid impinger of Example Aa) was simplified to give a single stage liquid impinger, consisting of a single impingement assembly with a filter downstream. The impingement assembly consisted of a vertical jet of internal diameter 1.9cm and a collection plate of diameter 3.8cm. At the upper end, the jet was bent through an angle of 90° and the insufflator was attached to the distal end of this horizontal portion. The impingement characteristics of this single stage device were intended to be such that material reaching the filter of this device is similar in

3126/4927/109/sm

-39-

0072046

particle size to that reaching the final two stages and filter of the multistage liquid impinger of Example Aa). The percentage of material reaching the filter of the device is determined.

- 5 In all samples of sodium cromoglycate prepared by the techniques exemplified above at least some of the particles were of toroidal (ring doughnut) shape.

10

15

20

25

-39-

3126/4927/109/sm

-40-

0072046

What we claim is:-

1. A finely divided inhalation drug comprising a therapeutically effective proportion of individual particles capable of penetrating deep into the lung, characterised in that a bulk of the particles which is both unagglomerated and unmixed with a coarse carrier, is sufficiently free flowing to be filled into capsules on an automatic filling machine and to empty from an opened capsule in an inhalation device.

2. An inhalation drug in finely divided and unagglomerated form, wherein a substantial proportion of the individual drug particles have a spherical, collapsed spherical or ring doughnut shape.

3. A drug according to Claim 2 which contains sodium cromoglycate and wherein the particles are of ring doughnut shape.

4. A finely divided inhalation drug, wherein the permeametry: BET ratio is in the range 0.5 to 1.0.

5. A drug according to any one of the preceding claims, wherein the particle density is from 1.3 to 1.7 g cm<sup>3</sup>.

6. A drug according to any one of the preceding claims, having a loose bulk density of greater than 0.3g/cm<sup>3</sup>.

7. A drug according to any one of the preceding claims having a packed bulk density of from 0.4 to 0.75g/cm<sup>3</sup>.

8. A drug comprising sodium cromoglycate, wherein more



3126/4927/109/sm

-41-

0072046

than 90% of the drug particles are less than 60 microns in diameter and the drug has a loose bulk density of greater than  $0.3\text{g/cm}^3$ .

5 9. A drug comprising sodium cromoglycate, wherein more than 90% of the drug particles are less than 60 microns in diameter and the drug has a packed bulk density of from  $0.4$  to  $0.75\text{g/cm}^3$ .

10 10. A drug according to any one of the preceding claims which comprises a mixture of sodium cromoglycate and a bronchodilator.

11. A drug according to any one of the preceding claims, wherein at least 50% of the drug particles are less than 60 microns in diameter.

15 12. A drug according to Claim 11, wherein at least 50% of the drug particles are less than 10 microns in diameter.

13. A pharmaceutical formulation, capsule or cartridge comprising a drug according to any one of the preceding claims.

20 14. A process for the production of a finely divided drug according to any one of the preceding claims, which comprises atomising and drying a solution of the drug and collecting some or all of the particles which are below 60 microns in diameter.

25 15. A process according to Claim 14, wherein the atomisation and drying is carried out in a spray drying

0072046

3126/4927/109/sm

-42-

0072046

apparatus comprising an atomiser, a main chamber and at least one cyclone or bag filter.

16. A finely divided inhalation formulation of sodium cromoglycate comprising a therapeutically effective proportion of individual particles comprising sodium cromoglycate and capable of penetrating deep into the lung, characterised in that a bulk of the particles which is both unagglomerated and unmixed with a coarse carrier, is sufficiently free flowing to be filled into capsules on an automatic filling machine and to empty from an opened capsule in an inhalation device, some of the particles being of ring doughnut shape and the permeametry : BET ratio of the particles being in the range 0.5 to 1.0

3126/4927/109/sm

-40-

0072046  
SEPARATE CLAIMS  
FOR AUSTRIAWhat we claim is:-

1. A process for the production of a finely divided inhalation drug comprising a therapeutically effective proportion of individual particles capable of penetrating deep into the lung, wherein a bulk of the particles which is both unagglomerated and unmixed with a coarse carrier, is sufficiently free flowing to be filled into capsules on an automatic filling machine and to empty from an opened capsule in an inhalation device, which process comprises atomising and drying a solution of the drug and collecting some or all of the particles which are below 60 microns in diameter.
2. A process according to Claim 1 wherein a substantial proportion of the individual drug particles have a spherical, collapsed spherical or ring doughnut shape.
3. A process according to Claim 2, wherein the drug contains sodium cromoglycate and the particles are of ring doughnut shape.
4. A process according to any one of the preceding claims, wherein the permeametry: BET ratio of the product particles is in the range 0.5 to 1.0.
5. A process according to any one of the preceding claims, wherein the particle density of the product particles is from 1.3 to 1.7 g cm<sup>3</sup>.
6. A process according to any one of the preceding

3126/4927/109/sm

-41-

0072046

claims, wherein the product particles have a loose bulk density of greater than  $0.3\text{g/cm}^3$ .

7. A process according to any one of the preceding claims, wherein the product particles have a packed bulk density of from 0.4 to 0.75g/cm<sup>3</sup>.

8. A process according to any one of the preceding claims wherein the drug comprises a mixture of sodium cromoglycate and a bronchodilator.

9. A process according to any one of the preceding claims, wherein at least 50% of the drug particles are less than 10 microns in diameter.

10. A process according to any one of the preceding claims, wherein the atomisation and drying is carried out in a spray drying apparatus comprising an atomiser, a main chamber and at least one cyclone or bag filter.


LIBRARY

0072046

1/12



10 μm 2000X

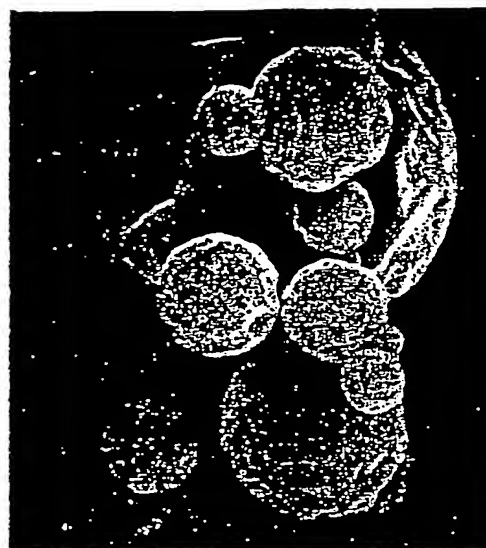

5 μm 5000X



5 μm 5000X




2 μm 10000X

Fig.1.


0072046

0072046


2/12

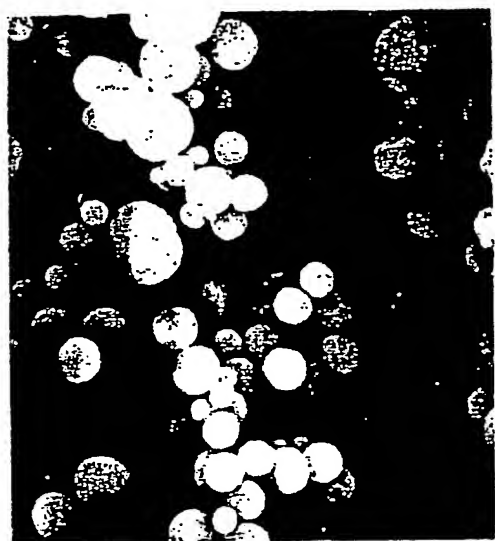

10 $\mu$ m 2000X

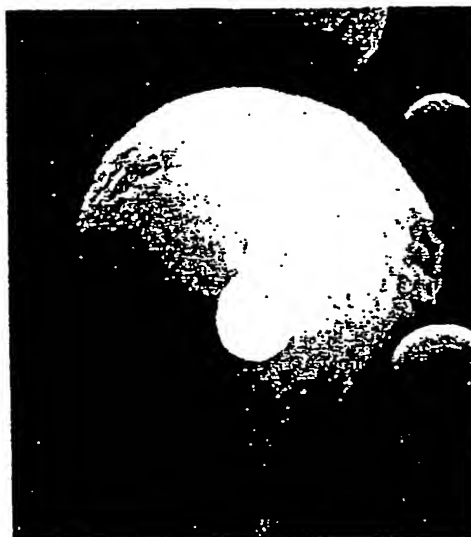

5 $\mu$ m 6000X

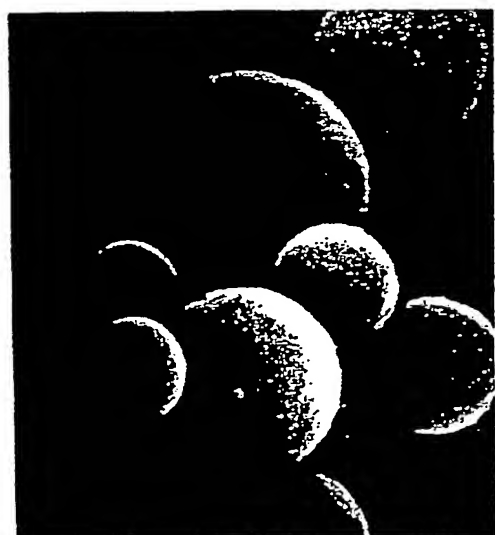

5 $\mu$ m 5000X



2 $\mu$ m 10000X

Fig.2.


0072046

3/12

0072046



10  $\mu$ m 2000X

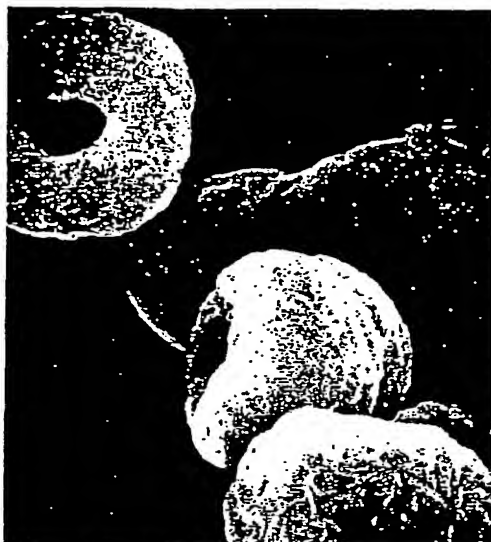

5  $\mu$ m 5000X



5  $\mu$ m 5000X



2  $\mu$ m 10000X

Fig.3.

0072046


0072046

4/12




10 $\mu$ m

2000X

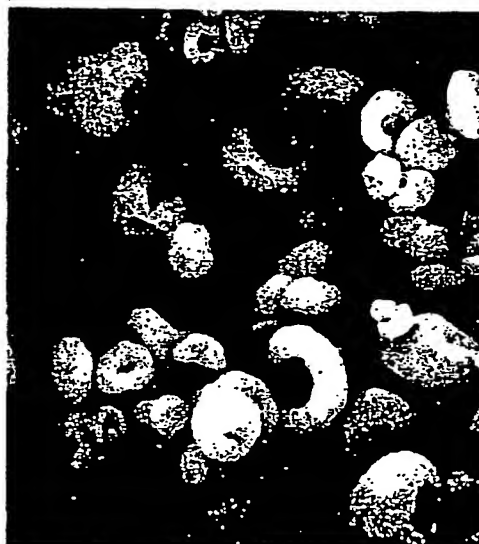

10 $\mu$ m

2000X

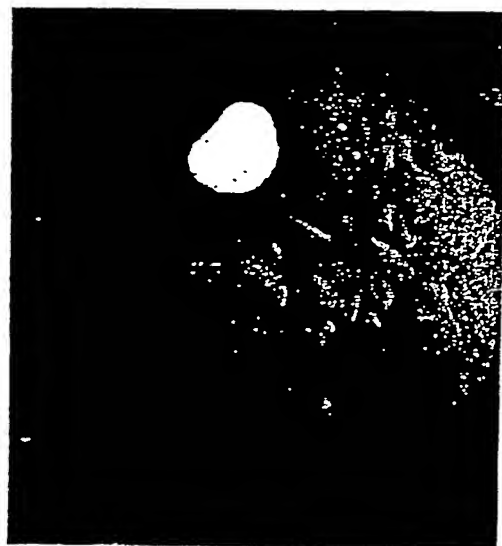

5 $\mu$ m

5000X



2 $\mu$ m

10000X

Fig.4.




0072046

5/12

0072046



10µm 2000X

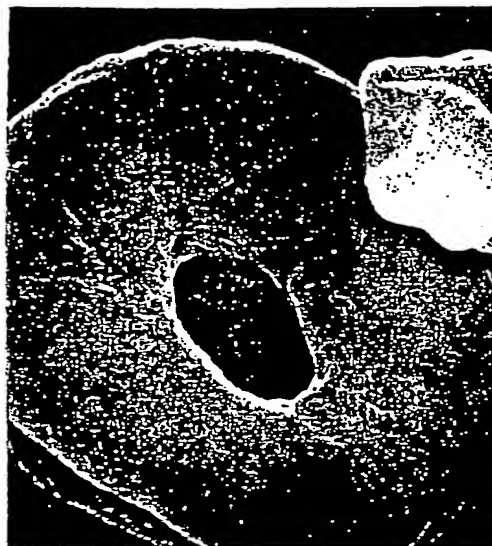

5µm 5000X



5µm 5000X



2µm 10000X

Fig. 5.


0072046

6/12


0072046



10µm 2000X

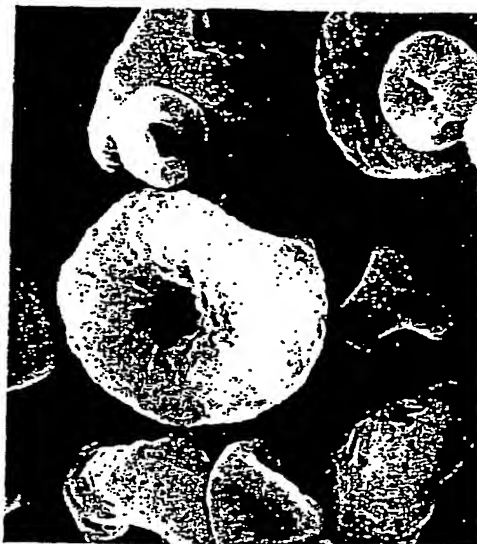

10µm 2000X

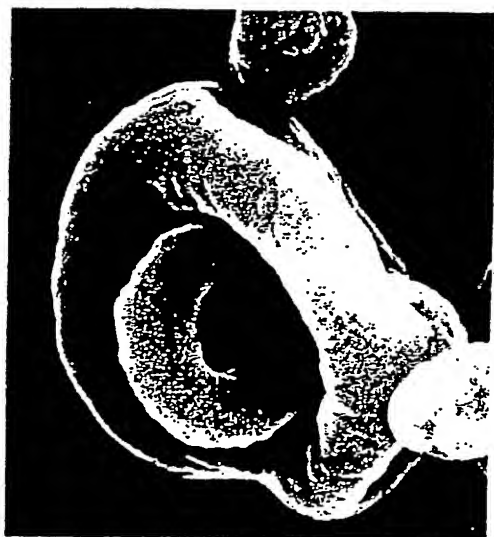

5µm 5000X




2µm 10,000X

Fig. 6.


0072046

7/12

0072046

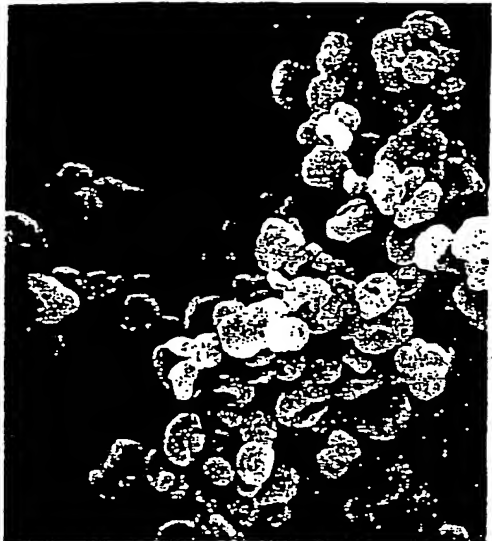

10 μm 2000X

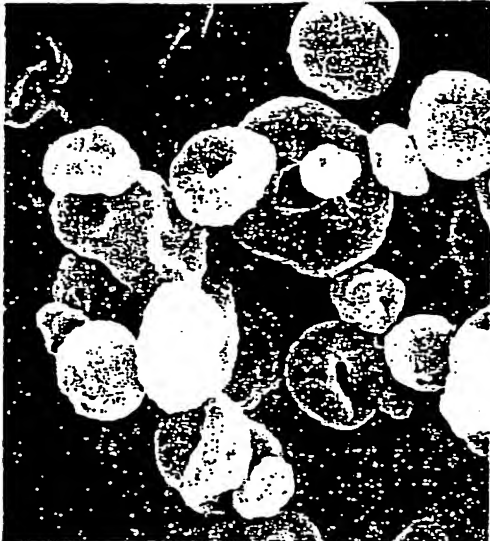

5 μm 5000X



5 μm 5000X



2 μm 10000X

Fig. 7.

00000000

8/12

0072046




2000X



2000X



5000X

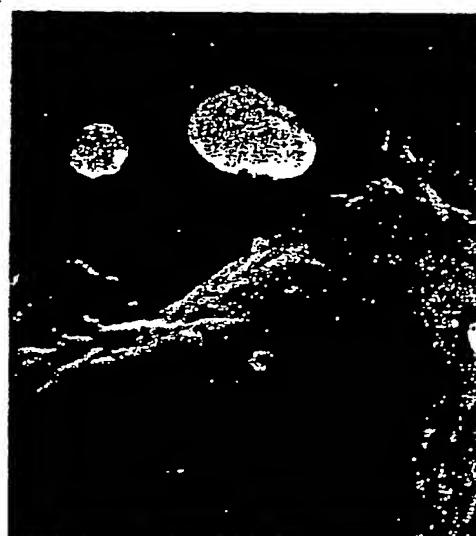

10,000X

Fig.8.

UO·U·B

0072046

9/12




10μm 2000X



10μm 2000X



5μm 5000X

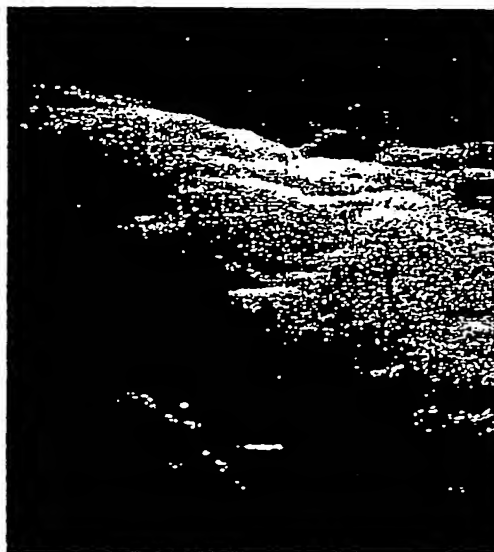

2μm 10,000X

Fig. 9.

0072046




Fig. 10.

0072046

11/12

0072046



10μm 2000X



10μm 5000X



1μm 10000X



1μm 10000X

Fig.11.

0072046

12/12


0072046



10 μm 2000X



10 μm 5000X

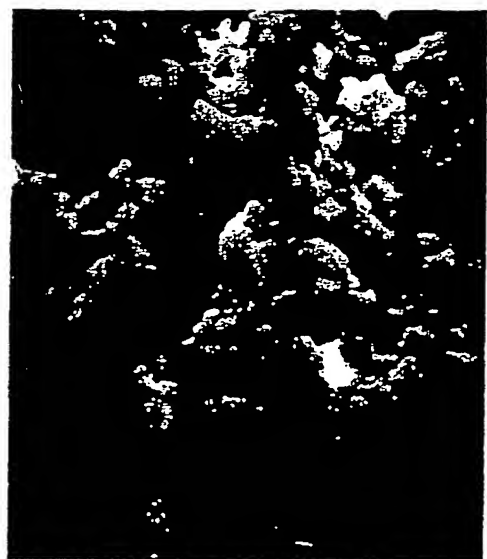

10 μm 5000X



1 μm 10000X

Fig.12.





European Patent  
Office

# EUROPEAN SEARCH REPORT

0072046  
Application Number

EP 82 20 0841

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 7)
D, Y	<p>--- US-A-3 957 965 (HARTLEY et al.) * Claim 1; column 2, lines 16-39; column 3, lines 11-14 *</p>	1, 14	<p>A 61 K 9/72 A 61 K 31/35</p>
Y	<p>--- GB-A-1 569 611 (FISONS)  * Page 4, lines 28-32, 35; page 5, lines 22-29; claims 19-21, 26, 27, 32, 33, 38, 46, 58 *</p>	1, 11-14	
Y	<p>--- GB-A-1 520 248 (FISONS) * Claims; page 4, lines 15-23, 28-29, 82-97; page 5, lines 14-28 *</p>	1, 14	
D, Y	<p>--- GB-A-1 549 229 (FISONS) * Claims 1-3 *</p> <p>-----</p>	1, 6, 7	<p>TECHNICAL FIELDS SEARCHED (Int. Cl. 7)</p> <p>A 61 K 9/00 A 61 K 31/00 C 07 D 311/00</p>
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 15-11-1982	Examiner WILLEKENS G. E. J.
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons</p> <p>&amp; : member of the same patent family, corresponding document</p>			

**THIS PAGE BLANK (USPTO)**

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ BLACK BORDERS

☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES

☐ FADED TEXT OR DRAWING

☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING

☐ SKEWED/SLANTED IMAGES

☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS

☐ GRAY SCALE DOCUMENTS

☒ LINES OR MARKS ON ORIGINAL DOCUMENT

☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY

☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**